



Ai-WS1-CBS-Kit Specification

Version V1.0.0

Copyright ©2024

Document resume

Version	Date	Develop/revise content	Edition	Approve
V1.0.0	2024.10.28	First Edition	Zekai Qian	Hong Xu

Content

1. Product overview	4
2. Main parameter	6
2.1. Electrostatic requirement	6
2.2. Electrical characteristic	7
2.3. Wi-Fi RF performance	7
2.4. BLE RF performance	8
2.5. SLE RF performance	8
3. Appearance size	9
4. Pin definition	10
5. Schematic diagram	11
6. Product packaging information	12
7. Contact us	12
Disclaimer and copyright notice	13
Notice	13
Important Statement	14

1. Product overview

Ai-WS1-CBS-Kit is a Wi-Fi 6+BLE5.2+SLE1.0 module development board developed by Ai-Thinker Co., LTD. It is equipped with Ai-WS1-CBS module, and adopts SDIO Goldfinger Dongle design, with Hi3873S chip as the core processor. Supports Wi-Fi 802.11b/g/n/ax, BLE and SLE. Hi3873S built-in high-performance self-developed 32bit CPU, up to 240MHz main frequency.

Hi3873S chip integrates a high-performance 32bit microprocessor and a security processing engine. Provide UART and GPIO interfaces, while supporting high-speed SDIO2.0 interface, the maximum clock up to 50MHz; As a slave machine, the chip is built and run to the host MCU through the SDIO interface.

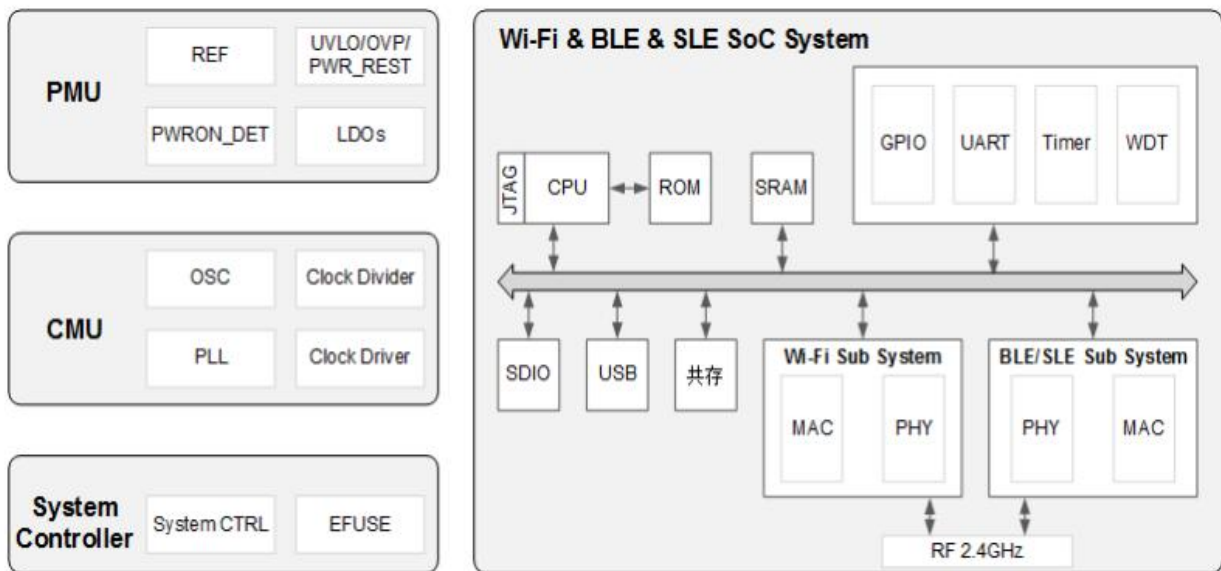


Figure 1 Main chip architecture diagram

1.1 Characteristics

- Adopt SDIO gold finger design
- Support 2.4GHz operating band
- Support IEEE 802.11 b/g/n/ax
- Support BLE4.0/4.1/4.2/5.0/5.1/5.2
- Support SLE1.0
- Wi-Fi security supports WPA/WPA2/WPA3 Personal/WPS2.0
- Support 20/40MHz bandwidth, 1T1R, up to 150Mbps
- Support STA、SoftAP、STA+SoftAP and STA+PTP co-existence model
- Support UART、USB2.0 and GPIO etc.
- Radio Frequency Integrated Balun、PA/LNA

2. Main parameter

Table 1 Description of Main Parameters

Model	Ai-WS1-CBS-Kit
Package	DIP-16
Size	26.0*27.0(±0.2)mm No plug-in section
Antenna	Stamp perforating machine
Frequency	2400 ~ 2483.5MHz
Operating temperature	-40°C ~ 85°C
Storage temperature	-40°C ~ 125°C, < 90%RH
Power supply	The power supply voltage is 3V to 3.6V, and the power supply current is $\geq 500\text{mA}$
Interface	UART、SDIO and GPIO etc.
IO	7
Security	WPA/WPA2/WPA3 Personal/WPS2.0
Flash	Without Flash

2.1. Electrostatic requirement

Ai-WS1-CBS-Kit is an electrostatic sensitive device, and special precautions should be taken when handling it.



Figure 2 ESD preventive measures

2.2. Electrical characteristic

Table 2 Table of Electrical Characteristics

Parameters	Conditio	Min.	Typical value	Max.	Unit
Supply voltage	VDD	3	3.3	3.6	V
I/O	VIL	-	-	0.3*VDDIO	V
	VIH	-	0.7*VDDIO	-	V
	VOL	-	-	0.1*VDDIO	V
	VOH	-	-	0.9*VDDIO	V
	IMAX	-	-	-	15

2.3. Wi-Fi RF performance

Table 3 Wi-Fi RF Performance Table

Description	Typical value			Unit
Spectrum range	2400 ~ 2483.5MHz			MHz
Output power				
Mode	Min.	Typical	Max.	Unit
11ax mode HE40, PA output power	-	15	-	dBm
11ax mode HE20, PA output power	-	16	-	dBm
11n mode HT40, PA output power	-	16	-	dBm
11n mode HT20, PA output power	-	17	-	dBm
In 11g mode, PA output power	-	18	-	dBm
In 11b mode, PA output power	-	22	-	dBm
Receiving sensitivity				
Mode	Min.	Typical	Max.	Unit
11b, 1 Mbps	-	-98	-	dBm
11b, 11 Mbps	-	-90	-	dBm
11g, 6 Mbps	-	-95	-	dBm
11g, 54 Mbps	-	-77	-	dBm
11n, HT20 (MCS7)	-	-74	-	dBm
11ax, HE20 (MCS9)	-	-70	-	dBm
11ax, HE40 (MCS9)	-	-67	-	dBm

2.4. BLE RF performance

Table 4 BLE RF Performance Table


Description	Typical value			Unit
Spectrum range	2400 ~ 2483.5MHz			MHz
Output power				
Rate mode	Min.	Typical	Max.	Unit
1Mbps	-	15	19	dBm
2Mbps	-	15	19	dBm
Receiving sensitivity				
Rate mode	Min.	Typical	Max.	Unit
1Mbps sensitivity @30.8%PER second	-	-99	-	dBm
2Mbps sensitivity @30.8%PER second	-	-97	-	dBm

2.5. SLE RF performance

Table 5 RF performance of SLE

Description	Typical value			Unit
Spectrum range	2400 ~ 2483.5MHz			MHz
Output power				
Rate mode	Min.	Typical value	Max.	Unit
1Mbps	-	15	19	dBm
2Mbps	-	15	19	dBm
Receiving sensitivity				
Receiving sensitivity	Receiving	Receiving	Receiving	Receiv
1Mbps sensitivity @30.8%PER	-	-99	-	dBm
2Mbps sensitivity @30.8%PER	-	-97	-	dBm

3. Appearance size

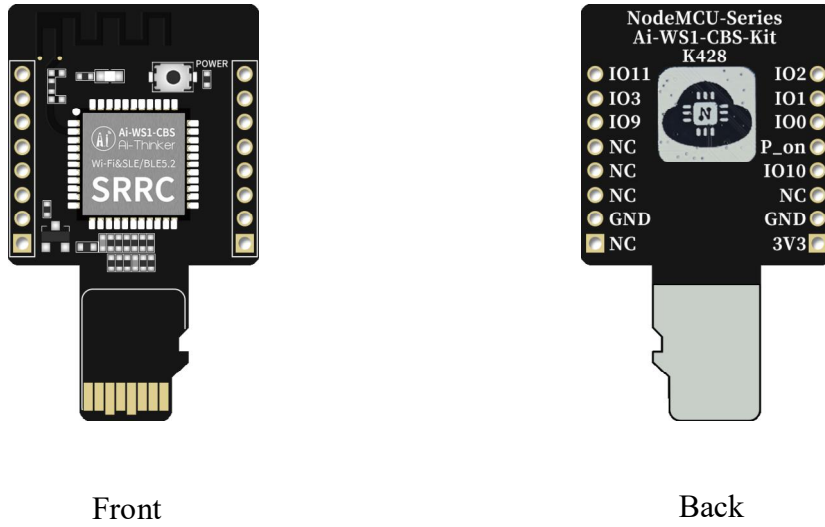

 **Figure 3 appearance diagram**

(Rendering diagram is for reference only, subject to actual objects)

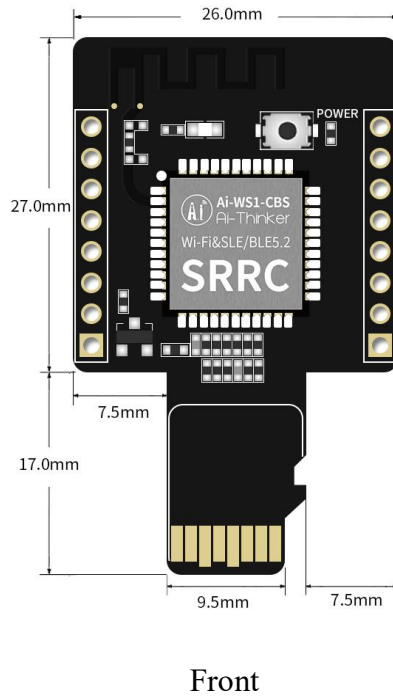


Figure 4 dimension diagram

4. Pin definition

Ai-WS1-CBS-Kit connects 16 pins in total, such as the pin diagram, and the pin function definition table is the interface definition.

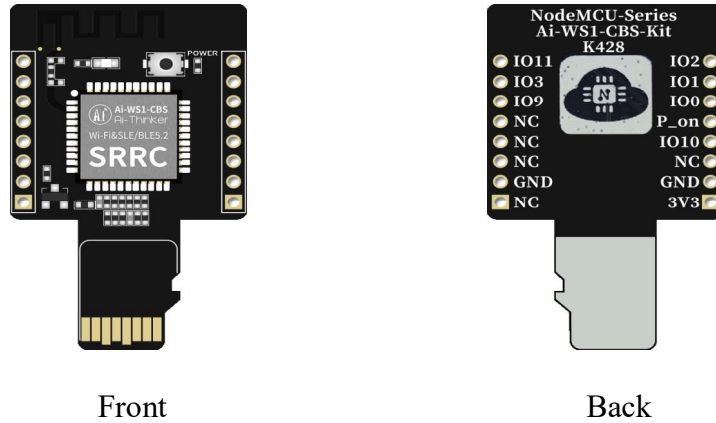


Figure 5 Pin diagram

Table 6 Pin function definition table

No.	Name	Functional description
1	IO2	GPIO2
2	IO1	GPIO1
3	IO0	GPIO0
4	P_on	Boot pin
5	IO10	GPIO10
6	NC	Hang out
7	GND	Ground
8	3V3	3.3V power supply. The recommended output current of the external power supply is more than 500mA
9	NC	Hang out
10	GND	Ground
11	NC	Hang out
12	NC	Hang out
13	NC	Hang out
14	IO9	GPIO9
15	IO3	GPIO3
16	IO11	GPIO11

Ai-WS1-CBS-Kit development board has a key, which is the POWER key and plays a reset role.

5. Schematic diagram

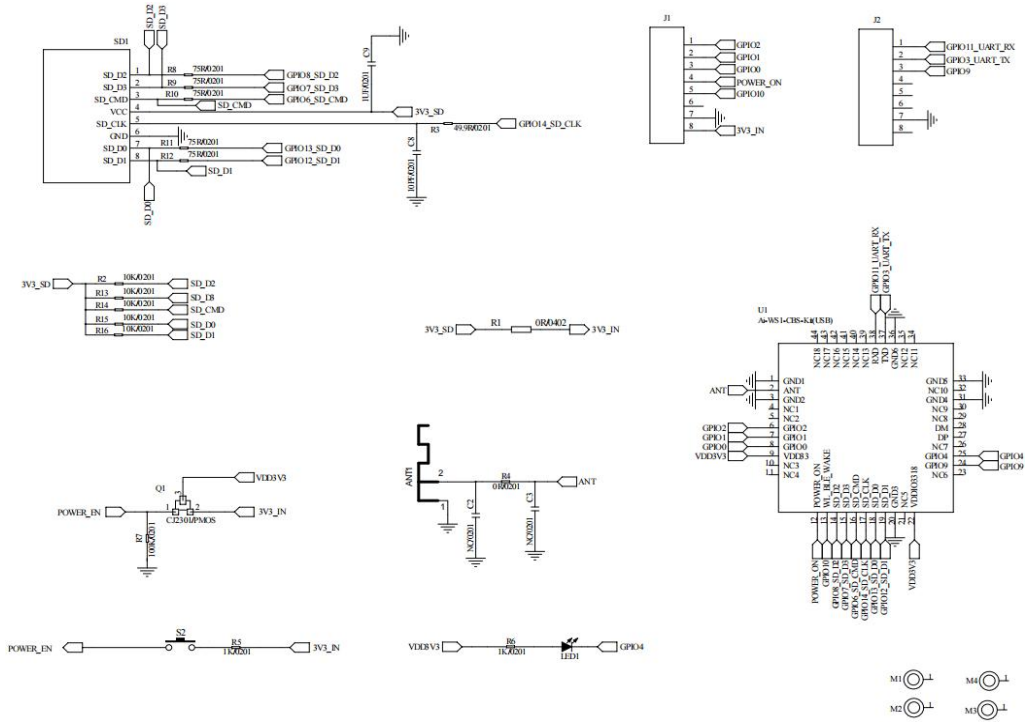


Figure 6 Schematic Diagram

6. Product packaging information

Table 7 Packaging information table

Packing List	Package	Quantity per packet (Electrostatic	Quantity per packet (Sealed bag)
Ai-WS1-CBS-Kit	Foam + electrostatic bag	1pcs	20pcs

7. Contact us

[Ai-Thinker official website](#)

[Office forum](#)

[Develop DOCS](#)

[LinkedIn](#)

[Tmall shop](#)

[Taobao shop](#)

[Alibaba shop](#)

[Technical support email: support@aithinker.com](mailto:support@aithinker.com)

[Domestic business cooperation: sales@aithinker.com](mailto:sales@aithinker.com)

[Overseas business cooperation: overseas@aithinker.com](mailto:overseas@aithinker.com)

Company Address: Room 403,408-410, Block C, Huafeng Smart Innovation Port, Gushu 2nd Road, Xixiang, Baoan District, Shenzhen.

Tel: +86-0755-29162996



WeChat mini program



WeChat official account

Disclaimer and copyright notice

The information in this article, including the URL address for reference, is subject to change without notice.

The document is provided "as is" without any guarantee responsibility, including any guarantee for merchantability, suitability for a specific purpose, or non-infringement, and any guarantee mentioned elsewhere in any proposal, specification or sample. This document does not bear any responsibility, including the responsibility for infringement of any patent rights arising from the use of the information in this document. This document does not grant any license for the use of intellectual property rights in estoppel or other ways, whether express or implied.

The test data obtained in the article are all obtained from Ai-Thinker's laboratory tests, and the actual results may vary slightly.

All brand names, trademarks and registered trademarks mentioned in this article are the property of their respective owners, and it is hereby declared.

The final interpretation right belongs to Shenzhen Ai-Thinker Technology Co., Ltd.

Notice

Due to product version upgrades or other reasons, the contents of this manual may be changed.

Shenzhen Ai-Thinker Technology Co., Ltd. reserves the right to modify the contents of this manual without any notice or prompt.

This manual is only used as a guide. Shenzhen Ai-Thinker Technology Co., Ltd. makes every effort to provide accurate information in this manual. However, Shenzhen Ai-Thinker Technology Co., Ltd. does not guarantee that the contents of the manual are completely free of errors. All statements and information in this manual And the suggestion does not constitute any express or implied guarantee.

Important Statement

Ai-Thinker provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design advice, web tools, safety information, and other resources "as is" (hereinafter referred to as "these resources"), There is no warranty against defects and no warranties of any kind, express or implied, including, but not limited to, express or implied warranties of fitness, fitness for a particular purpose, or non-infringement of any third party intellectual property rights, are disclaimed. And specifically disclaims responsibility for any inevitable or incidental losses including but not limited to the application or the use of any products and circuits of our company.

Ai-Thinker reserves the right to change the information released in this document (including but not limited to indicators and product descriptions) and any involved products of the company without prior notice. This document automatically supersedes and replaces the previous version of the same document number. All information provided.

These resources are available to skilled developers designing with Ai-Thinker products. You will be solely responsible for the following: (1) Select the appropriate Ai-Thinker product for your application; (2) Design, verify, and operate your application and product throughout the life cycle; (3) Ensure that your application meets all Appropriate standards, codes and laws, and any other functional safety, information security, regulatory or other requirements.

Ai-Thinker authorizes you to use these resources only to develop applications for the Ai-Thinker products described in this resource. Without the permission of Ai-Thinker, no unit or individual may excerpt, copy part or all of these resources, and shall not spread them in any form. You have no right to use any other Ai-Thinker intellectual property or any third party intellectual property. You shall fully indemnify and in no event shall Ai-Thinker be liable to Ai-Thinker and its representatives for any claims, damages, costs, losses and liabilities arising out of the use of these resources.

Products offered by Ai-Thinker are subject to Ai-Thinker's Terms of Sale or other applicable terms accompanying Ai-Thinker products. Ai-Thinker's provision of these resources does not extend or otherwise alter the applicable warranties or warranty disclaimers for product releases.