

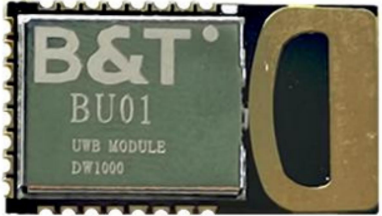


UWB模组对比表

型号	BU04	BU03	BU01
图片			
尺寸	35.5*33.5*3.4(±0.2)mm	23.0*13.0*2.5(±0.2)mm	23*13*2.5(±0.2)MM
天线	板载PCB天线兼容IPEX座	陶瓷天线	板载PCB天线
封装	SMD-34	SMD-24	SMD-24
芯片方案	STM32F103C6T6+DW3000	DW3000	DW1000
接口	SPI, UART, I2C	SPI	SPI
供电电压	供电电压2.5V~3.6V, 典型值3.3V	供电电压2.5V~3.6V, 典型值3.3V	供电电压2.8V~3.6V, 典型值3.3V
可用IO数量	20个	9个	7个
极限测距	25M	25M	45M
定位算法	TWR+PDOA	TWR+PDOA	TWR+TDOA
工作电流	<79mA	<53mA	<53mA
速率	850 kbps, 6.8 Mbps	850 kbps, 6.8 Mbps	110 kbps, 850 kbps, 6.8 Mbps
测距精度	10cm	10cm	10cm
认证			